




SIGN-TOPPERS


SIMPLY BETTER L.E.D. DISPLAYS


LED SIGN Order Detail	Height(ft))	2	Width(ft):	8	Total single side(sq. ft)	16	Total double side(sq. ft)	32
-----------------------	-----------------	----------	------------	----------	---------------------------	-----------	---------------------------	-----------


DOUBLE SIDED 2' X 8' Date:

Item	Picture	Product Detail	Brand	Quantity	CABINETS	Total/USD				
Product		Product Type	P6.35 LED SIGN		SIGN-TOPPERS	8	CABINETS	2' X 2'		
		Display Size(Ft)	Height(ft):	2					Width(ft):	8
		Module Size	12in x 12in							
		Cabinet Material	Aluminium waterproof cabinet for front service with locker							
		Led Lamp	Gold Wire Lamp							
		Resolution	Width(dots):	384					Height(dots):	96
		Single Side or Double Side	Double Side							
Control System		Novastar controller TB30 WIFI +4G	Novastar	1	piece	\$480	Included			
		Novastar Receiving card MRV412	Novastar	8	piece	\$19	Included			
Spare Part		Backup p6.35 smd outdoor display module Module size is:12in x 12in	12' x 12' MODULES	2	piece	\$79	included			
		Backup p6.35 smd outdoor display module Module size is:12in x 12in	12' x 12' MODULES	2	piece	\$79	Included			
		Novastar Receiving card MRV412	Novastar	1	piece	19	included			
		Xingxu power supplier UL 100-240V	xingxu	1	set	34	included			
		Power cables with two male connectors	POWER CABLE	3	set	\$15	included			
Package		Wooden case for Led Sign	SHIPPING	1	piece					
TOTAL										

Product Technical Information












LED Module	Pixel pitch	6.35mm	
	Pixel configuration	1RGB	
	LED type	SMD2727 Nationstar Gold Wire lamp	
	LED module size	12in x 12in	
	LED module resolution	48 x 48	
	Pixels per sqm.	24800 pixels	
	LEDs qty. per sqm.	24800 pcs	
	Display refresh rate	1920 Hz	
	Scan mode	1/6 scan	
	Brightness	10000cd/sqm	
	Viewing angle	Horizontal: 140° Vertical: 140°	

Cabinet	Cabinet type	Aluminium waterproof cabinet	
	LED cabinet dimension	Width: 609.6mm Depth:1219.2mm	
	LED cabinet weight	23kg/m2	
	Ingress Protection	IP65/IP65	
	Serviceability	Front service with locker	
	Components in cabinet: Modules, Supply power, Receiving card, cables.connector		

Power supply	Power consumption (max.)	650 watts/sqm	
	Power consumption (average.)	150 watts/sqm.	
	Input voltage	AC 110V -220V +/- 10%	
Operation	Storage environment	Temperature: -40°C ~ 60°C Humidity: 10% ~ 85% RH	
	Operating environmnt	Temperature: -20°C ~ 50°C Humidity: 10% ~ 90% RH	
	Lifespan (typical)	≥100,000 hours	
	MTBF	≥10,000 hours	
Source compatibility	CVBS, YC, YUV, RGB, DVI, SDI, HD-SDI, HDMI		


Payment Terms and Warranty	1. This price is valid for 30 days.
	2. Payment terms: financing available or cash deposit 75% down
	3. Delivery terms: FOB or EXW
	4. Packing: Wooden case.
	5. Lead time: 15-25 days after receiving deposit.
	6. Warranty:5 years
	7. On site installation not included in price.
	8. Support 24-hours remote engineer service support
	9. Support 24-hour quotation service

Installation Technical Information

Installation Method				
	SIDE AND BOTTOM BRACKETS	HOLES AND BRACKETS	SIDE BRACKETS	THRU POLE - DOUBLE (POLES OPTIONAL)
				
	WALL GUSSETS	VERTICAL ANGLES	HORIZONTAL ANGLES	
				
	SIDE HOLES	SIDE AND BOTTOM HOLES	THRU POLE SINGLE (POLE OPTIONAL)	PROVIDED SEPARATELY THRU POLE - POLE COVER (POLES OPTIONAL)

1 SET Double Side Led Sign 2X8ft				
Power Parameters	The Access Voltage is 200-240V	Single Side Led Sign	Power consumption (max.): 960W	Power consumption (average.): 320W
		Double Side Led Sign	Power consumption (max.): 1920W	Power consumption (average.): 640W
	The Access Voltage is 100-110V	Single Side Led Sign	Power consumption (max.): 1200W	Power consumption (average.): 400W
		Double Side Led Sign	Power consumption (max.): 2400W	Power consumption (average.): 800W
Breaker and power cable Infortation	The Access Voltage is 200-240V	Double Side Led Sign		2 set 20amp breaker 2 main power cable
	The Access Voltage is 100-110V	Double Side Led Sign		2 set 30amp breaker 2 main power cable

Product Description

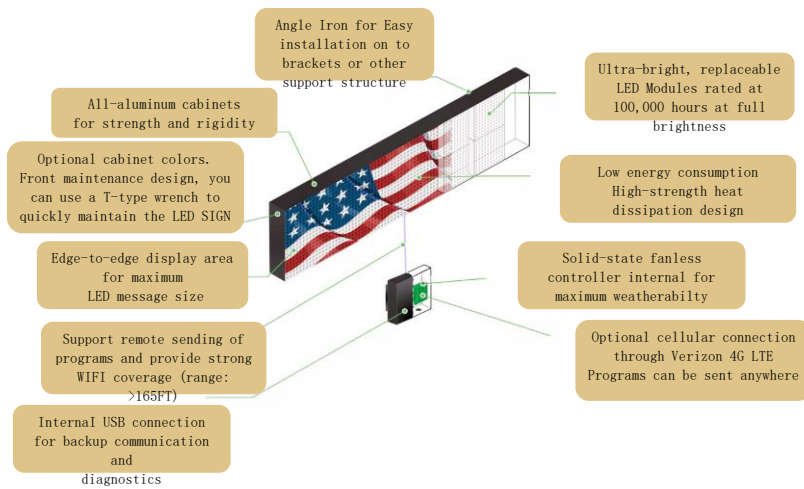

Contact Information

--	--